



# BRUSH CUTTERS

FOR SKID STEERS & COMPACT UTILITY LOADERS



**THE LEADER OF THE PACK—ANY WAY YOU CUT IT.**

# THE LEADER OF THE PACK

any way you cut it.





Brush Wolf Features .....2  
The Brush Wolf Difference.....4

## SKID STEER CUTTERS

### OPEN-FRONT CUTTERS

ALPHA .....6  
Extreme-Duty Series .....8  
Heavy-Duty Series ..... 10  
Standard-Duty Series..... 12  
Compact Series ..... 14

### CLOSED-FRONT CUTTERS

Multi-Spindle Series ..... 16  
Heavy-Duty Series ..... 18  
Compact Series ..... 20

## COMPACT UTILITY LOADER CUTTERS

Open-Front Compact..... 14  
Closed-Front Compact ..... 20

## CUTTER COMPARISON CHARTS

All Open-Front Cutters ..... 22  
All Closed-Front Cutters ..... 24



# BUILT FOR LIFE

Experience the most reliable, indestructible hydraulic rotary brush cutters on the market. All Brush Wolf cutters are engineered with advanced features that lead the way in innovative design and development.

## PREMIUM HYDRAULIC MOTORS

Powered by a high-performance radial piston motor with a robust bearing housing OR a Geroler-style hydraulic motor paired with a right-angle gearbox for ultimate efficiency.



## BLADE ACCESS COVER

Direct access to the blade bolts through the blade access cover makes replacing blades quick and hassle-free.

## SAFETY STEPS

Non-slip, serrated metal steps ensure safe and easy in and out.

## MOTOR GUARD / HOOD

The motor guard/hood is crafted from durable 12-gauge steel and is hinged for effortless motor access.

## PARTS ALWAYS AVAILABLE

Genuine OEM parts are always available on our online parts store.

## GEARBOX SEAL PROTECTION

Welded collar around the gearbox seal prevents wire from damaging the gearbox.


## BEST BUILD QUALITY ON THE MARKET

Our frames are continuously welded across each seam for added strength and powder-coated to prevent rust and scratches.



## CLEAN DECK DESIGN

Each deck is crafted from a single piece of ultra-durable steel. The "clean deck" design allows material to glide off during operation preventing unwanted buildup of debris.

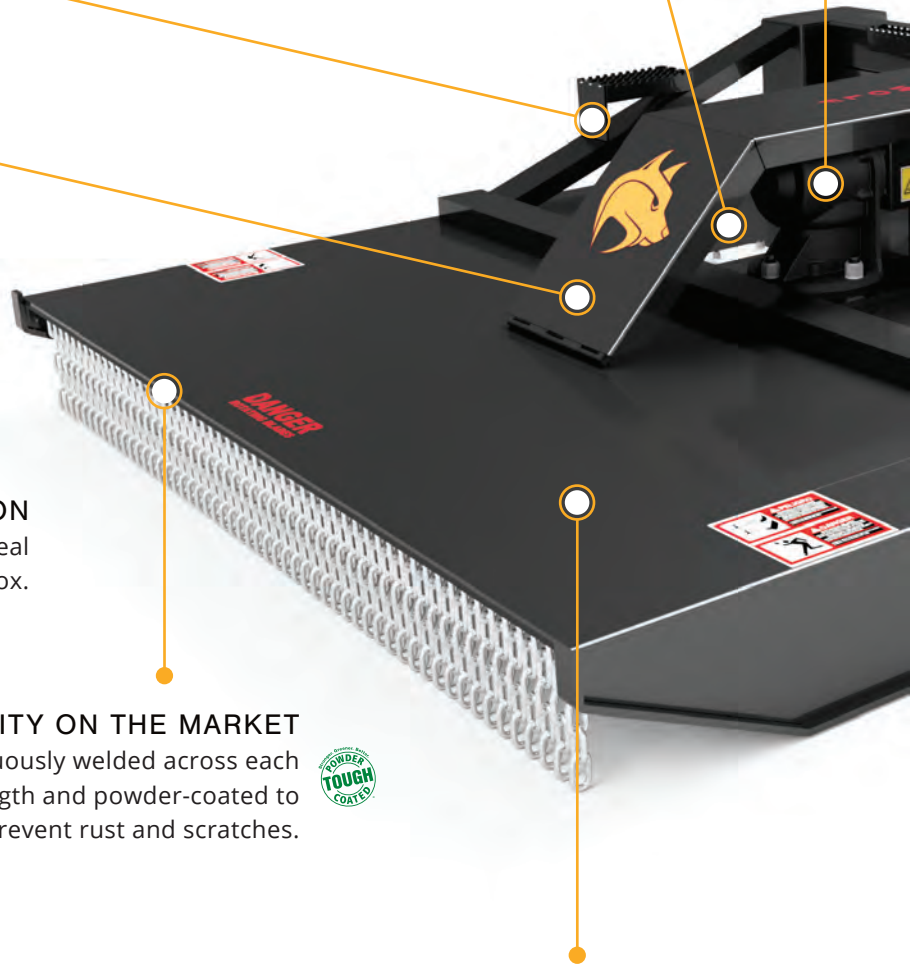

# POWER + PERFORMANCE

## PLUG + PLAY READY

Ready to shred brush upon delivery with quick-connect couplers, hydraulic hoses encased in protective wrap, and dust caps.

## LIFT LIMIT CHAIN

The added safety chain prevents the cutter from being lifted too high. (On selected models.)

## UNIVERSAL QUICK ATTACH SYSTEM

Our universal pick-up plates attach quickly to any operating machine.

## LONG-LASTING BLADES

Our high-tempered, industrial-strength steel blades are heat treated, have a milled edge, and are Supertuf coated to stand the test of time.



## BLADE CARRIER

Ultra-smooth, CNC-balanced blade carriers prevent unnecessary vibration.


## ULTRA-RUGGED DECK FRAME

We added boxed-in gusset reinforcements, extra bracing, and supports to make our cutters crazy strong.



## CUSTOMER SERVICE + SUPPORT

The customer is always KING. We're with you every step of the way with unlimited support.

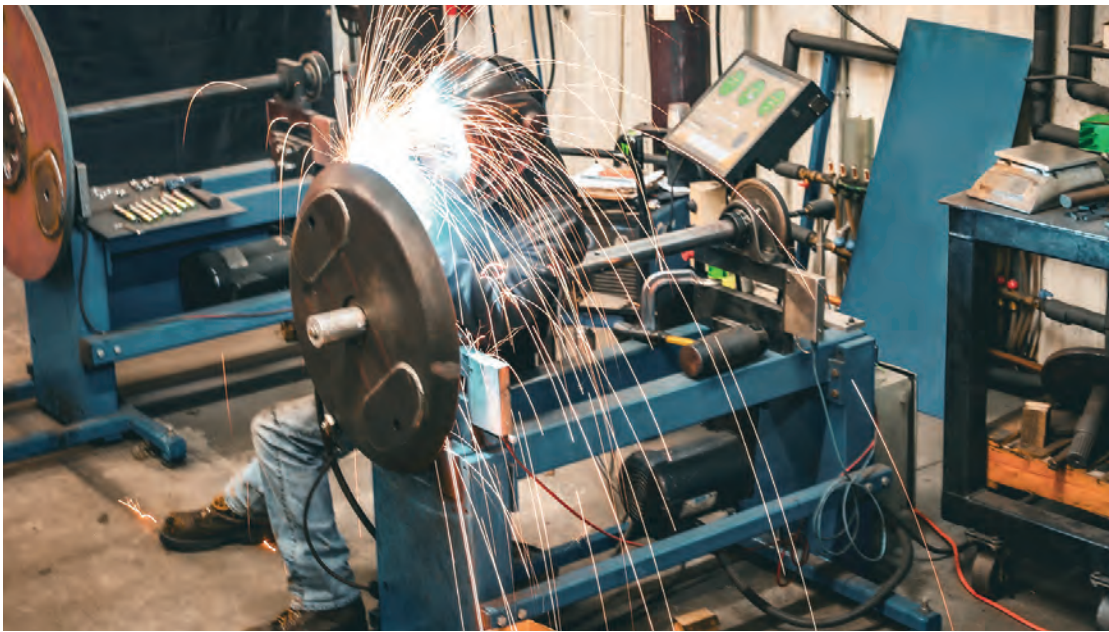

### WHY OUR CUTTERS LAST LONGER

Our cutters are built to last, crafted from a single piece of ultra-rugged steel that is fully boxed and continuously welded. This meticulous construction ensures unparalleled durability. Additionally, our unique powder coating process further enhances their longevity, setting our cutters apart from the rest.



**SSAB**



Photo by customer JL Landworx

## WE DO ONE THING—AND WE DO IT WELL.

At Brush Wolf, we're masters of our craft, focusing solely on perfection. Our indestructible hydraulic rotary brush cutters are built tough to conquer rough terrain and thrive in the harshest environments. With a legacy that spans over two decades, we've been the pioneers of the rotary brush-cutting industry, setting the standard for innovation.

We're proud to make, design, fabricate, assemble, powder coat, and test every cutter under one roof in Crosslake, Minnesota.



# OPEN-FRONT ALPHA

We beefed up the direct-drive piston motor and paired it with a massive 3.25" shaft diameter bearing housing for extreme cutting power. The unique "v-notch" design delivers a closer cut and operator precision when leveling trees and saplings. And by trees, we mean 10" thick trees. We then demanded the most robust blade carrier system on the market (there are two to choose from), so you'll get the performance and power to master the toughest, most demanding jobs.



**"PROBABLY SELL MY FORESTRY  
MULCHER NOW! 10" TREE IS  
NOTHING FOR THIS THING ON  
HIGH FLOW!"**

— Richard Senn  
ALPHA Owner



#### MOTOR TYPE

SAI® radial piston hydraulic motor

#### DRIVE TYPE

Direct drive

#### BEARING HOUSING SHAFT


Eskridge® bearing housing with 2.625" shaft diameter

#### MOTOR PROTECTION

Pressure relief valves, case drain

#### MAX PSI (CONT./INT.)

3,000/4,100



#### DECK THICKNESS

1/4 in

#### HOOD/MOTOR GUARD

12-ga vented hood

#### PUSH BAR

Fully-supported serrated push bar with teeth

#### HOSES + DUST CAPS

114" hydraulic hoses encased in protective wrap and guarded with extreme-duty spiral hose wrap, quick-connect couplers, and dust caps included



#### BLADE CARRIER & BLADES OPTION

##### Standard 3-Blade Carrier

1" GRD-50 disc with 3 heat-treated, Supertuf coated drop-down blades; non-updraft to cut and discharge material quickly

##### Optional 4-Blade Carrier

Two-piece 5/8" thick steel discs with 4 Hardox® 500 flat blades; non-updraft to cut and discharge material quickly

#### BLADE ROTATION

Counterclockwise





**3-BLADE CARRIER**  
STANDARD



**4-BLADE CARRIER**  
OPTIONAL

**MODEL OPTIONS**

	ALPHA HD 3-Blades	ALPHA XP 3-Blades	ALPHA HD 4-Blades	ALPHA XP 4-Blades
<b>Cutting Width</b>	72 in	72 in	72 in	72 in
<b>Hydraulic Flow (GPM)</b>	23-32	33-45	23-32	33-45
<b>Max Cutting Diameter</b>	10 in	10 in	10 in	10 in
<b>Tip Speed (ft/min)</b>	10,300- 14,300	13,200- 18,000	10,300- 14,300	13,200- 18,000
<b>Weight</b>	2,320 lbs	2,320 lbs	2,570 lbs	2,570 lbs

Full specs are listed on page 22.

OPEN-FRONT

# EXTREME-DUTY SERIES

72/O | 78/O

A true workhorse built tough for industrial and commercial applications. You can rely on these cutters to consistently tackle heavy brush and trees up to 8" in diameter. The unique open front "v-notch" design allows for increased operator precision cutting of trees and saplings. Tip speed and torque are optimum for efficient cutting with a massive 1" blade carrier and three high-tempered steel drop blades.



***"WE JUST LOVE HOW YOUR EQUIPMENT HOLDS UP TO THE HARSH CLIMATE AND UNFORGIVING TERRAIN."***

— Mark of Matanuska-Susitna Borough Operations & Maintenance in Palmer, Alaska



**MOTOR TYPE**

SAI® radial piston hydraulic motor

**DRIVE TYPE**

Direct drive

**BEARING HOUSING SHAFT**


Eskridge® bearing housing with 2.625" shaft diameter

**MOTOR PROTECTION**

Pressure relief valves, case drain

**MAX PSI (CONT./INT.)**

4,000



**DECK THICKNESS**

1/4 in

**HOOD/MOTOR GUARD**

12-ga vented hood

**HOSES + DUST CAPS**

114" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



**BLADES**


3 heat-treated, Supertuf coated drop-down blades; non-updraft to cut and discharge material quickly

**BLADE CARRIER**

1" GRD-50 disc

**BLADE ROTATION**

Counterclockwise

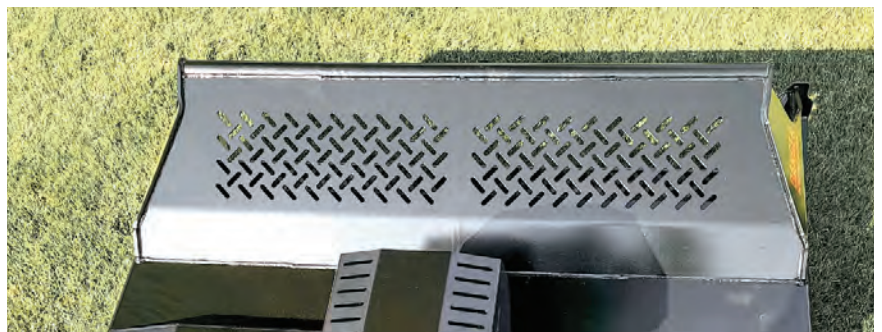

**MODEL OPTIONS**

	72 HD/O	72 XP/O	78 HD/O	78 XP/O
<b>Cutting Width</b>	72 in	72 in	78 in	78 in
<b>Hydraulic Flow (GPM)</b>	23-29	30-40	23-29	30-40
<b>Max Cutting Diameter</b>	8 in	8 in	8 in	8 in
<b>Tip Speed (ft/min)</b>	10,300-13,000	13,000-16,000	11,100-14,000	13,000-17,300
<b>Weight</b>	1,490 lbs	1,490 lbs	1,610 lbs	1,610 lbs

Full specs are listed on page 22.

OPEN-FRONT

# HEAVY-DUTY SERIES

6601 | 7201 | 7801

Our open-front cutters thrive in harsh environments thanks to the exposed high-tempered steel blades that blast through thick brush. The unique open front design lets you selectively cut vegetation before deck contact and then discharge the debris quickly to accelerate your job completions. The field-proven combination of the easy-to-maintain hydraulic motor and 65HP right-angle gearbox speeds up the rotation to achieve the highest torque possible while maintaining a proven tip speed.

***"AS ALWAYS BRUSH WOLF LIVED UP TO ITS NAME & REPUTATION!! WE ARE VERY PLEASED!!!"***

— Ellis Smallwood,  
Owner of Smallwood's Land Management LLC



#### MOTOR TYPE

Eaton® Geroler-style hydraulic motor

#### DRIVE TYPE


Right-angle Omni Gear® gearbox

#### MOTOR PROTECTION

Pressure relief valves, GRD-2 shear bolt

#### MAX PSI (CONT./INT.)

3,000/3,500



#### DECK THICKNESS

1/4 in

#### HOOD/MOTOR GUARD

12-ga hinged motor guard

#### CHAIN CURTAIN

Rear 5/16" replaceable chains

#### HOSES + DUST CAPS

78" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



#### BLADES

2 heat-treated, Supertuf coated drop-down blades

#### BLADE CARRIER

5/16" GRD-50 spun-formed pan stump jumper

#### BLADE ROTATION

Counterclockwise



#### MODEL OPTIONS

	6601 LF	6601 SF	7201 LF	7201 SF	7201 LF	7801 SF	7801 HF
<b>Cutting Width</b>	66 in	66 in	72 in	72 in	72 in	78 in	78 in
<b>Hydraulic Flow (GPM)</b>	10-15	16-25	15-25	21-25	26-40	20-25	26-40
<b>Max Cutting Diameter</b>	3 in	4 in	3 in	4 in	5 in	4 in	5 in
<b>Tip Speed (ft/min)</b>	8,000-12,000	11,200-17,500	13,000-17,400	13,800-17,400	11,500-17,600	15,000-17,800	12,500-19,200
<b>Weight</b>	1,124 lbs	1,124 lbs	1,220 lbs	1,220 lbs	1,270 lbs	1,310 lbs	1,390 lbs


Full specs are listed on page 22.

OPEN-FRONT

# STANDARD-DUTY SERIES

SD6000 | SD7200

Designed for efficiency and durability, the standard-duty series incorporates the same reliable drive and blade carrier components as our proven heavy-duty series, but at a more affordable price. To enhance cost-effectiveness, we've streamlined these cutters by removing the chain curtains, and motor guard, and using a lighter support structure. Pound for pound, you won't find a better deal on the market.

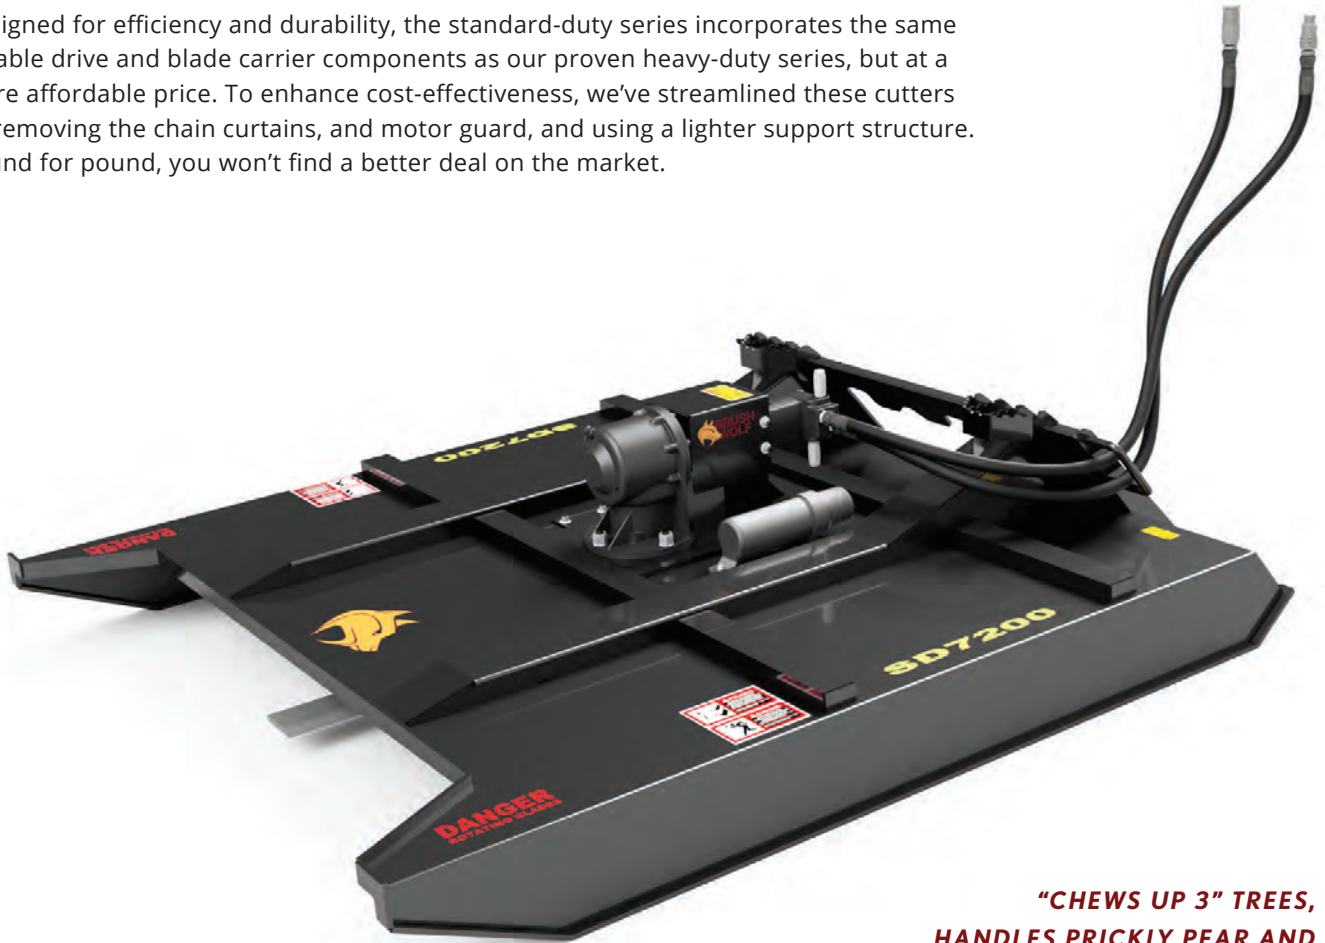

***"CHEWS UP 3" TREES,  
HANDLES PRICKLY PEAR AND  
MULCHES IT ALL. EXCELLENT FOR  
ELECTRIC FENCE LINE."***

— Max, Brush Wolf owner from Texas



**MOTOR TYPE**

Eaton® Geroler-style hydraulic motor

**DRIVE TYPE**


Right-angle Omni Gear® gearbox

**MOTOR PROTECTION**

Pressure relief valves, GRD-2 shear bolt

**MAX PSI (CONT./INT.)**

3,000/3,500



**DECK THICKNESS**

1/4 in

**HOSES + DUST CAPS**

78" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



**BLADES**

2 heat-treated, Supertuf coated drop-down blades; non-updraft to cut and discharge material quickly

**BLADE CARRIER**

5/16" GRD-50 spun-formed pan stump jumper

**BLADE ROTATION**

Counterclockwise



	MODEL OPTIONS			
	SD6000 LF	SD6000	SD7200 LF	SD7200
<b>Cutting Width</b>	60 in	60 in	72 in	72 in
<b>Hydraulic Flow (GPM)</b>	10-15	16-25	15-20	21-25
<b>Max Cutting Diameter</b>	3 in	4 in	3 in	4 in
<b>Tip Speed (ft/min)</b>	9,300-14,000	11,500-18,000	13,000-17,400	13,800-17,400
<b>Weight</b>	840 lbs	830 lbs	1,000 lbs	1,000 lbs

Full specs are listed on page 22.

OPEN-FRONT

# COMPACT SERIES

4201 | 4801

Don't let the size fool you; these mighty cutters may be small, but they pack all the power and performance of their larger counterparts. Designed to fit through tight spaces, they are versatile enough to be used anywhere. The 4201 is built to fit all compact utility loaders such as Vermeer, Toro Dingo, Ditch Witch, Bobcat MT-50, and others. The 4801 is compatible with compact utility loaders ranging from small to full-size skid loaders, thanks to its various pickup plate options.



UNIVERSAL MINI PICKUP PLATE

UNIVERSAL STANDARD PICKUP PLATE



**MOTOR TYPE**

Eaton® Geroler-style hydraulic motor

**DRIVE TYPE**


Right-angle Omni Gear® gearbox

**MOTOR PROTECTION**

Pressure relief valves, GRD-2 shear bolt

**MAX PSI (CONT./INT.)**

3,000/3,500



**DECK THICKNESS**

4201: 10-ga | 4801: 7-ga

**HOOD/MOTOR GUARD**

12-ga hinged motor guard

**CHAIN CURTAIN**

Rear

**HOSES + DUST CAPS**

Hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



**BLADES**

2 heat-treated, Supertuf coated drop-down blades; updraft for lift and mulching action

**BLADE CARRIER**

1" GRD-50 bar

**BLADE ROTATION**

Counterclockwise





***THE ONLY MINI SKID STEER  
BRUSH MOWER AGGRESSIVE  
ENOUGH TO CLEAN UP  
OVERGROWN BRUSH.***

	MODEL OPTIONS		
	4201	4801 LF	4801 SF
Cutting Width	42 in	48 in	48 in
Hydraulic Flow (GPM)	8-20	8-15	16-25
Max Cutting Diameter	2 in	3 in	3 in
Tip Speed (ft/min)	6,500-16,200	7,500-14,000	11,750-18,400
Weight	470 lbs	672 lbs	690 lbs

Full specs are listed on page 22.

CLOSED-FRONT

# MULTI-SPINDLE SERIES 9000

The mighty 9000 can cut more in a single pass than any other rotary brush cutter. These extra wide machines provide a whopping 7.5 feet of complete cutting coverage, leaving no ground untouched. The multi-spindle design utilizes two separate motor/gearbox drive assemblies to power four high-strength tempered steel blades to quickly clear large tracts of land. One trip down the trail, and you're done!



#### MOTOR TYPE

Eaton® Geroler-style hydraulic motor

#### DRIVE TYPE


Right-angle Omni Gear® gearbox

#### MOTOR PROTECTION

Pressure relief valves, GRD-2 shear bolt

#### MAX PSI (CONT./INT.)

3,000/3,500



#### DECK THICKNESS

1/4 in

#### HOOD/MOTOR GUARD

12-ga motor guard

#### CHAIN CURTAIN

Front and rear 5/16" replaceable chains

#### HOSES + DUST CAPS

90" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



#### BLADES


4 heat-treated, Supertuf coated drop-down blades; updraft for lift and mulching action

#### BLADE CARRIER

2 1" GRD-50 discs

#### BLADE ROTATION

Counterclockwise

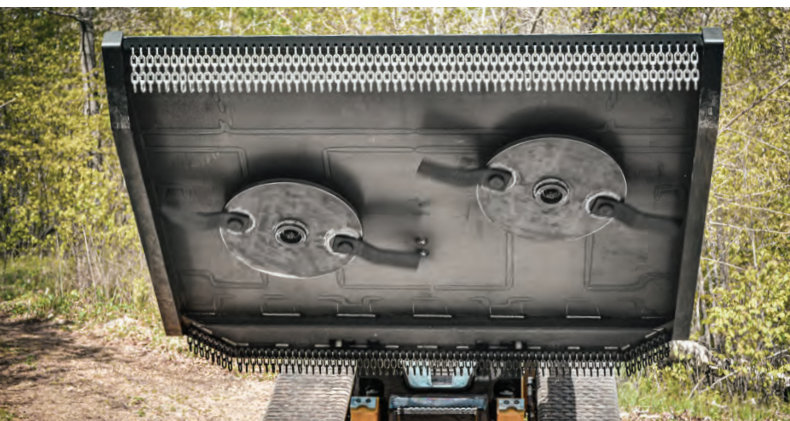

***"THE 9000...REALLY HAS NO COMPETITION."***

— caninecombatives,  
via Instagram

#### MODEL OPTIONS

	9000 SF	9000 HF
Cutting Width	90 in	90 in
Hydraulic Flow (GPM)	20-25	26-40
Max Cutting Diameter	4 in	5 in
Tip Speed (ft/min)	14,200-17,800	9,600-14,800
Weight	1,790 lbs	1,840 lbs

Full specs are listed on page 24.

CLOSED-FRONT

# HEAVY-DUTY SERIES

6000 | 6600 | 7200 | 7800

Think simplistic design and rugged construction with ease of use, low service cost, and reliability built-in. That's why these cutters have remained so popular and virtually unchanged for over twenty years. You'll receive exceptional performance because each model has been engineered with the top-of-the-line Geroler-style hydraulic motor and right-angle gearbox to optimize the full capacity of your operating equipment.



***"STILL GOING STRONG  
...THEY'RE NOT JOKING  
WHEN THEY SAY BUILT TO LAST.  
MY CUTTER CUTS AS GOOD AS IT DID  
WHEN I FIRST BOUGHT IT...20 YEARS AGO!"***

— Doug Young, farmer and land developer, MN



#### **MOTOR TYPE**

Eaton® Geroler-style hydraulic motor

#### **DRIVE TYPE**


Right-angle Omni Gear® gearbox

#### **MOTOR PROTECTION**

Pressure relief valves, GRD-2 shear bolt

#### **MAX PSI (CONT./INT.)**

3,000/3,500



#### **DECK THICKNESS**

1/4 in

#### **HOOD/MOTOR GUARD**

12-ga hinged motor guard

#### **CHAIN CURTAIN**

Front and rear 5/16" replaceable chains

#### **HOSES + DUST CAPS**

78" hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



#### **BLADES**


2 heat-treated, Supertuf coated drop-down blades; updraft for lift and mulching action

#### **BLADE CARRIER**

5/16" GRD-50 spun-formed pan stump jumper

#### **BLADE ROTATION**

Counterclockwise

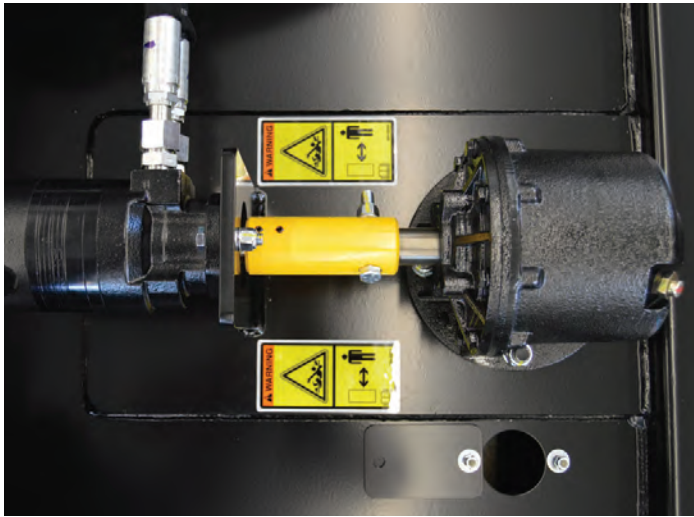

**MODEL OPTIONS**

	6000 LF	6000 SF	6600 LF	6600 SF	7200 LF	7200 SF	7200 HF	7800 SF	7800 HF
<b>Cutting Width</b>	60 in	60 in	66 in	66 in	72 in	72 in	72 in	78 in	78 in
<b>Hydraulic Flow (GPM)</b>	10-15	16-25	10-15	16-25	15-20	21-25	26-40	20-25	26-40
<b>Max Cutting Diameter</b>	3 in	4 in	3 in	4 in	3 in	4 in	5 in	4 in	5 in
<b>Tip Speed (ft/min)</b>	9,300-14,000	11,500-18,000	8,000-12,000	11,200-17,500	13,000-17,400	13,800-17,400	11,500-17,600	15,000-17,800	12,500-19,200
<b>Weight</b>	950 lbs	950 lbs	1050 lbs	1050 lbs	1,160 lbs	1,160 lbs	1,210 lbs	1,280 lbs	1,340 lbs

Full specs are listed on page 24.

CLOSED-FRONT

# COMPACT SERIES

4200 | 4800

Upgrade your mini compact utility loader into a formidable cutting powerhouse with the Brush Wolf compact cutter. Engineered for agility, these powerful cutters effortlessly navigate tight spaces. The 4200 model is compatible with compact utility loaders such as Vermeer, Toro Dingo, Ditch Witch, Bobcat MT-50, and others. The 4800 model is versatile, fitting both compact utility loaders and full-size skid loaders, with various pickup plate options available.



#### MOTOR TYPE

Eaton® Geroler-style hydraulic motor

#### DRIVE TYPE


Right-angle Omni Gear® gearbox

#### MOTOR PROTECTION

Pressure relief valves, GRD-2 shear bolt

#### MAX PSI (CONT./INT.)

3,000/3,500



#### DECK THICKNESS

4200: 10-ga | 4800: 7-ga

#### HOOD/MOTOR GUARD

12-ga hinged motor guard

#### CHAIN CURTAIN

Front and rear 5/16" replaceable chains

#### HOSES + DUST CAPS

Hydraulic hoses encased in protective wrap, quick-connect couplers, and dust caps included



#### BLADES

2 heat-treated, Supertuf coated drop-down blades; updraft for lift and mulching action

#### BLADE CARRIER

1" GRD-50 bar

#### BLADE ROTATION

Counterclockwise



***“THE BRUSH WOLF 4200 IS JUST THE TICKET IF YOU NEED TO TAKE CARE OF SOME OVERWHELMINGLY OVERGROWN AREAS.”***

— Richey & Clapper, Inc.  
Outdoor Power Equipment, Sudbury, MA

	MODEL OPTIONS		
	4200	4800 LF	4800 SF
Cutting Width	42 in	48 in	48 in
Hydraulic Flow (GPM)	8-20	8-15	16-25
Max Cutting Diameter	2 in	3 in	3 in
Tip Speed (ft/min)	6,500-16,200	7,500-14,000	11,750-18,400
Weight	470 lbs	672 lbs	690 lbs

Full specs are listed on page 24.

# OPEN-FRONT CUTTERS

FOR SKID STEERS & COMPACT UTILITY LOADERS



	COMPACT SERIES			STANDARD-DUTY SERIES				HEAVY-DUTY SERIES		
	4201	4801 LF	4801 SF	SD6000 LF	SD6000	SD7200 LF	SD7200	6601 LF	6601 SF	7201 LF
<b>Hydraulic Flow (GPM)</b>	8-20	8-15	16-25	10-15	16-25	15-20	21-25	10-15	16-25	15-20
<b>Tip Speed (ft/min)</b>	6,500-16,200	7,500-14,000	11,750-18,400	9,300-14,000	11,500-18,000	13,000-17,400	13,800-17,400	8,000-12,000	11,200-17,500	13,000-17,400
<b>Max Cutting Diameter</b>	2 in	3 in	4 in	3 in	4 in	3 in	4 in	3 in	4 in	3 in
<b>Cutting Width</b>	42 in	48 in		60 in		72 in		66 in		72 in
<b>Weight</b>	470 lbs	672 lbs	690 lbs	840 lbs	830 lbs	1,000 lbs		1,124 lbs		1,220 lbs
<b>Overall Width</b>	43.75 in	49.75 in		61.75 in		73.75 in		67.75 in		73.75 in
<b>Overall Length</b>	58.25 in	60 in		72.25 in		84.25 in		78.25 in		84.25 in
<b>Blades</b>	(2) 14.75 X 4 X 0.5 in; updraft			(2) 22 X 4 X 0.5 in non-updraft		(2) 28 X 4 X 0.5 in non-updraft		(2) 25 x 4 x 0.5 in updraft		(2) 28 x 4 x 0.5 in
<b>Chain Curtain(s)</b>	Rear			—				Rear		
<b>Hood/Motor Guard</b>	12-ga hinged motor guard			—				12-ga hinged, motor guard		
<b>Max PSI (cont./int.)</b>	3,000/3,500									
<b>Blade Carrier Type</b>	1" GRD-50 bar			5/16" GRD-50 spun-formed pan						
<b>Motor Type</b>	Eaton® Geroler-style hydraulic motor									
<b>Drive Type</b>	Right-angle gearbox									
<b>Bearing Housing Shaft</b>	—									
<b>Motor Protection</b>	Pressure relief valves, GRD-2 shear bolt									
<b>Deck Thickness</b>	10-ga (.135 in)	7-ga (.188 in)		1/4 in						
<b>Hoses &amp; Dust Caps</b>	66" w/ wrap, caps			78" hoses w/ protective wrap, dust caps						
<b>Warranty</b>	5-year limited warranty: structural components, materials, and weldment 1.5-year limited warranty: motor, gearbox, and bearing housing									



## PRODUCT SPECIFICATIONS



HEAVY-DUTY SERIES				EXTREME-DUTY SERIES				ALPHA			
7201 SF	7201 HF	7801 SF	7801 HF	72 HD/O	72 XP/O	78 HD/O	78 XP/O	ALPHA HD 3-Blades	ALPHA XP 3-Blades	ALPHA HD 4-Blades	ALPHA XP 4-Blades
21-25	26-40	20-25	26-40	23-29	30-40	23-29	30-40	23-32	33-45	23-32	33-45
13,800-17,400	11,500-17,600	15,000-17,800	12,500-19,200	10,300-13,000	13,000-16,000	11,100-14,000	13,000-17,300	10,300-14,300	13,200-18,000	10,300-14,300	13,200-18,000
4 in	5 in	4 in	5 in	8 in				10 in			
72 in	72 in	78 in		72 in	78 in			72 in			
1,220 lbs	1,270 lbs	1,310 lbs	1,390 lbs	1,490 lbs	1,610 lbs			2,320 lbs		2,570 lbs	
73.75 in	73.75 in	79.75 in		75.25 in	81.25 in			75.25 in			
84.25 in	84.25 in	90.25 in		72 in	78 in			82 in			
(2) 28 x 4 x 0.5 in non-updraft		(2) 31 x 4 x 0.5 in updraft		(3) 25 x 4 x 0.5 in non-updraft		(3) 28 x 4 x 0.5 in non-updraft		(3) 18 x 5 x 0.625 non-updraft drop-blades		(4) 18 x 8.5 x 0.625 Hardox® 500 non-updraft flat-blades	
Rear				—							
12-ga hinged, motor guard				12-ga vented hood							
3,000/3,500				4,000				3,000/4,100			
5/16" GRD-50 spun-formed pan				1" GRD-50 disc						Two-piece 5/8" steel discs	
Eaton® Geroler-style hydraulic motor				SAI® radial piston hydraulic motor							
Right-angle gearbox				Direct drive							
—				Eskridge® bearing housing with 2.625" shaft diameter							
Pressure relief valves, GRD-2 shear bolt				Pressure relief valves, case drain							
1/4 in											
78" hoses w/ protective wrap, dust caps				114" hoses with protective wrap, dust caps							
5-year limited warranty: structural components, materials, and weldment 1.5-year limited warranty: motor, gearbox, and bearing housing											

# CLOSED-FRONT CUTTERS

FOR SKID STEERS & COMPACT UTILITY LOADERS



	COMPACT SERIES			HEAVY-DUTY SERIES			
	4200	4800 LF	4800 SF	6000 LF	6000 SF	6600 LF	6600 SF
<b>Hydraulic Flow (GPM)</b>	8-20	8-15	16-25	10-15	16-25	10-15	16-25
<b>Tip Speed (ft/min)</b>	6,500-16,200	7,500-14,000	11,750-18,400	9,300-14,000	11,500-18,000	8,000-12,000	11,200-17,500
<b>Max Cutting Diameter</b>	2 in	3 in	4 in	3 in	4 in	3 in	4 in
<b>Cutting Width</b>	42 in	48 in		60 in		66 in	
<b>Weight</b>	470 lbs	672 lbs	690 lbs	950 lbs		1,050 lbs	
<b>Overall Width</b>	43.75 in	49.75 in		61.75 in			
<b>Overall Length</b>	58.25 in	60 in		72.25 in		78.25 in	
<b>Blades</b>	(2) 14.75 X 4 X 0.5 in; updraft			(2) 22 X 4 X 0.5 in; updraft			
<b>Chain Curtain(s)</b>	Front; rear						
<b>Hood/Motor Guard</b>	12-ga hinged motor guard						
<b>Max PSI (cont./int.)</b>	3,000/3,500						
<b>Blade Carrier Type</b>	1" GRD-50 bar			5/16" GRD-50 spun-formed pan			
<b>Motor Type</b>	Eaton® Geroler-style hydraulic motor						
<b>Drive Type</b>	Right-angle gearbox						
<b>Bearing Housing Shaft</b>	—						
<b>Motor Protection</b>	Pressure relief valves, GRD-2 shear bolt						
<b>Deck Thickness</b>	10-ga (.135 in)	7-ga (.188 in)		1/4 in			
<b>Hoses &amp; Dust Caps</b>	66" hoses w/ wrap, caps	78" hoses w/ protective wrap, dust caps					
<b>Warranty</b>	5-year limited warranty: structural components, materials, and weldment 1.5-year limited warranty: motor, gearbox, and bearing housing						

## PRODUCT SPECIFICATIONS



HEAVY-DUTY SERIES					MULTI-SPINDLE SERIES	
7200 LF	7200 SF	7200 HF	7800 SF	7800 HF	9000 SF	9000 HF
15-20	21-25	26-40	20-25	26-40	20-25	26-40
13,000-17,400	13,800-17,400	11,500-17,600	15,000-17,800	12,500-19,200	14,200-17,800	9,600-14,800
3 in	4 in	5 in	4 in	5 in	4 in	5 in
72 in			78 in		90 in	
1,160 lbs		1,210 lbs	1,280 lbs	1,340 lbs	1,790 lbs	1,840 lbs
73.75 in			79.75 in		93.25 in	
84.25 in			90.25 in		78.375 in	
(2) 28 x 4 x 0.5 in; updraft			(2) 31 x 4 x 0.5 in; updraft		(4) 14.75 x 4 x 0.5 in; updraft	
Front; rear						
12-ga hinged motor guard					12-ga motor guard	
3,000/3,500						
5/16" GRD-50 spun-formed pan					(2) 1" GRD-50 discs	
Eaton® Geroler-style hydraulic motor						
Right-angle gearbox						
—						
Pressure relief valves, GRD-2 shear bolt						
1/4 in						
78" hoses w/ protective wrap, dust caps					90" hoses with protective wrap, dust caps	
5-year limited warranty: structural components, materials, and weldment 1.5-year limited warranty: motor, gearbox, and bearing housing						



**5** YEAR  
LIMITED  
WARRANTY

Brush Wolf cutters are built for life, which is why we stand behind each and every one of them with our unmatched 5-year limited warranty.

MADE IN  
**USA**

Everything we make, design, fabricate, assemble, powder coat, and test is proudly done under one roof in Crosslake, Minnesota.



THE LEADER OF THE PACK—ANY WAY YOU CUT IT.  
218-692-1050 | [sales@brushwolf.com](mailto:sales@brushwolf.com) | [brushwolf.com](http://brushwolf.com)